

TYPE WR – 150



DESCRIPTION

The **WR-150** series air grilles are square or rectangular grilles suitable for return-extraction air applications. They consist of one row of fixed blades at 45° and can be mounted on walls, ceilings and ducts.

Their main characteristics are:

- Special anti-vibrant bearings for the blades' support, preventing vibrations and noise generation.
- Air-tight seal around the rear side perimeter in contact, to prevent air leakage and blackening of the false ceiling. Available for the 32 mm width frame.

NOMINAL SIZES

The **WR-150** grilles are available in any combination of dimensions to meet the needs of the project.

We highlight that:

- The order dimensions are the dimensions of the **opening**.
- The blades are placed parallel to the **first** dimension of the grille.

AIR GRILLE WITH ONE ROW OF FIXEDBLADES

ACCESSORIES

- Opposed blades volume damper, adjustable by an easily accessible key. **(-D)**
- Dust or grease filter. The dust filters are available in white **VILEDON** or net black **FCU** type. Grease filters are metallic. (See relevant brochure). **(-F)**
- The grilles can be accessible **(-A)**, with or without filter and filter case. (See relevant brochure).
- Mesh screen for the restraint of foreign objects, insects, etc. **(-M)**
- The grilles are available with 32 mm or 19 mm width frame.

INSTALLATION – FIXING

Each grille frame has counter punched holes and is delivered with flat-head, self-drilling screws, powder coated in the same RAL colour as the grille. For concealed installation, the frame has no holes.

AIR FLOW CONTROL

The volume damper is easily regulated by a key or a regulating screw.

MATERIALS

Frame and blades: Extruded aluminium anodized in matt silver or powder coated in RAL colour.

Bearings: Polyethylene resistant up to 45°C. For resistance in higher temperatures, the blades are placed on steel spring.

Frame seal: «Ω» type PVC. (Only available for 32 mm width frame).


Volume damper: Aluminium.

Screws: Galvanized steel (DIN 7504).


SPECIFICATION TEXT

Return or extraction air grille of rectangular shape, consisting of fixed blades at 45° from anodized aluminium. Suitable for installation on walls and ducts. With optional volume damper.


FOR ORDER PURPOSE, THE FIRST GIVEN DIMENSION REFERS TO THE DIMENSION PARALLEL TO THE BLADES

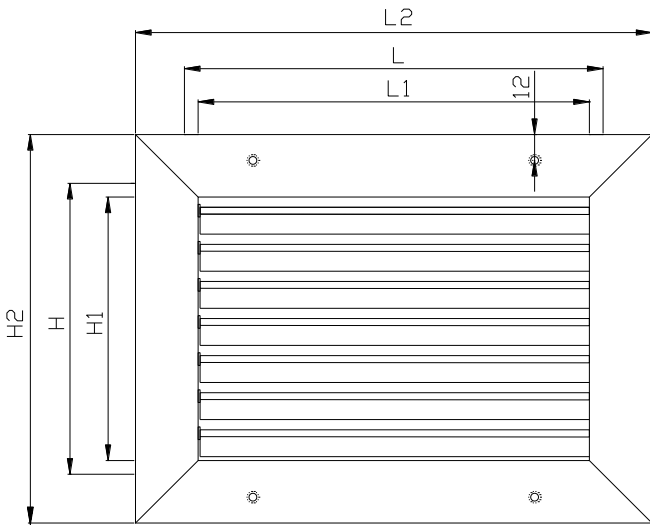


WR-150 – VIEW (L x H)

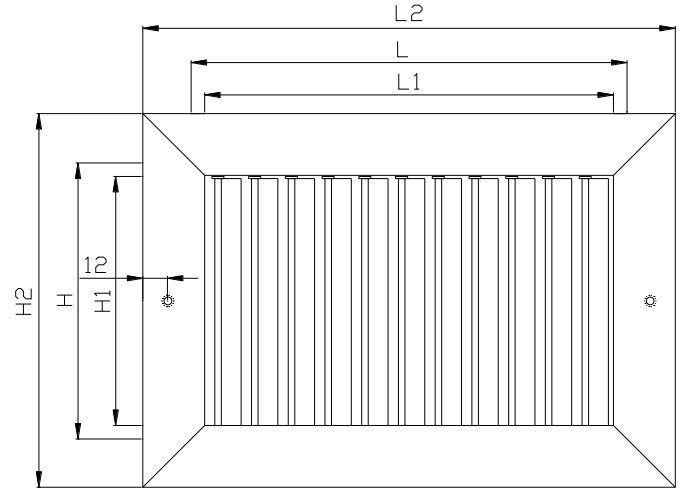

WR-150 – VIEW (H x L)

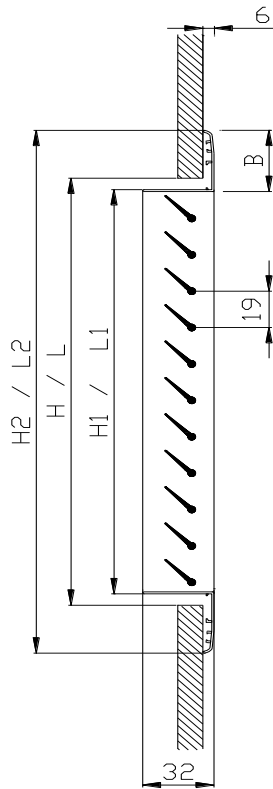

WR-150 – SECTION

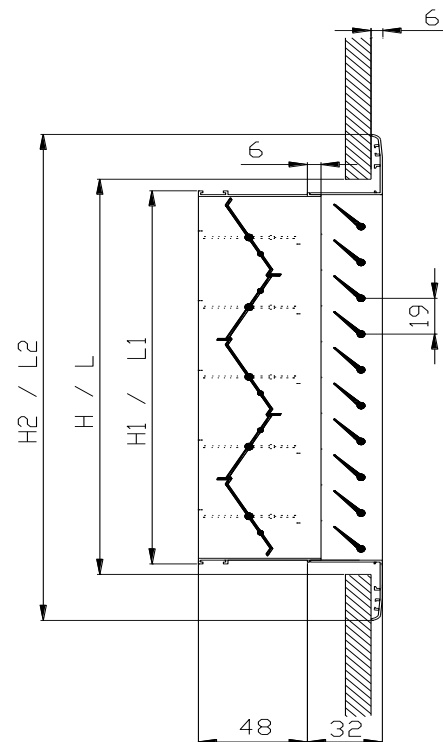

WR-150-D – SECTION WITH DAMPER

- L : Nominal length – horizontal dimension
- H : Nominal height – vertical dimension
- L_1 : Length $L_1 = L - 12\text{mm}$ to -16mm
- H_1 : Height $H_1 = H - 12\text{mm}$ to -16mm
- L_2 : Overall length $L_2 = L_1 + 2B$
- H_2 : Overall height $H_2 = H_1 + 2B$
- B : Frame width. Typical 32 mm. Optional 19 mm.

NOTES

1. When ordering, refer first to the dimension parallel to the blades, i.e. for horizontal blades length is specified first and for vertical blades height is specified first.
2. Volume damper is available for all types.
3. The grille comes with counter punched holes and self-drilling screws in the same RAL colour.
4. The number of holes are two (one on the right and one on the left) for grilles up to 250 mm, and four (two on the top and two on the bottom) for grilles over 300 mm.