

TYPE ACDR

ACCESS DOOR



DESCRIPTION

Access door with hidden mechanism for opening and closing without the use of door handle. The access door is also available without the mechanism to use as a closed air-grille (code **CG**).

NOMINAL SIZES


The **ACDR** access door is available in any combination of dimensions to meet the needs of the project.

INSTALLATION - FIXING


The access door frame has counter punched holes and is delivered with flat-head, self-drilling screws, powder coated in the same RAL color as the door. Frame for concealed screw fixing is also available.

MATERIALS


Extruded aluminium, anodized in matt silver or powder coated with in RAL color.

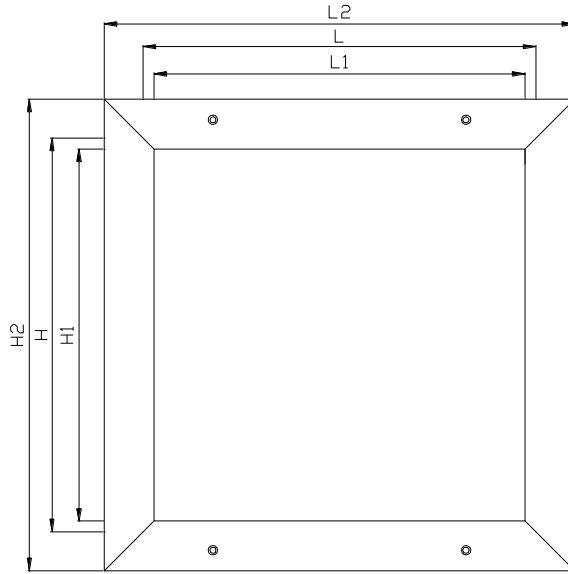

ACDR/CG – VIEW

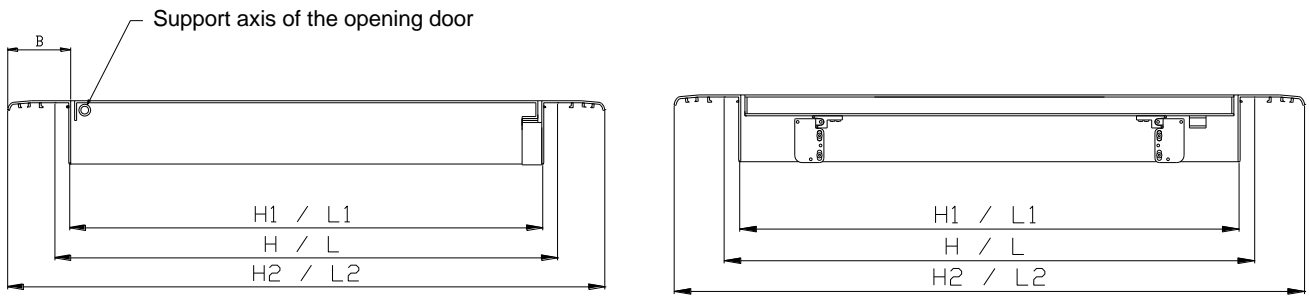

ACDR – SECTIONS

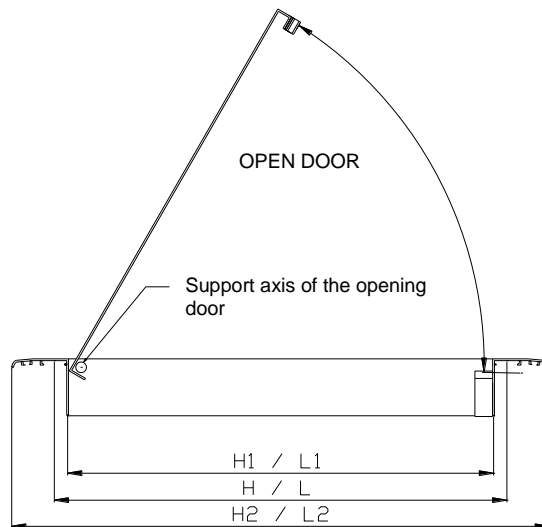

ACDR – SECTION (DOOR OPEN)

- L : Nominal length – horizontal dimension
H : Nominal height – vertical dimension
L₁ : Length $L_1 = L - 10\text{mm}$
H₁ : Height $H_1 = H - 10\text{mm}$
L₂ : Overall length $L_2 = L_1 + 2B$
H₂ : Overall height $H_2 = H_1 + 2B$
B : Frame width. Typical 32 mm. Optional 19 mm.

NOTES

1. The access door comes with counter punched holes and self-drilling screws in the same RAL color.
2. The number of holes is two (one on the right and one on the left) for access doors up to 250 mm, and four (two on the top and two on the bottom) for access door over 300 mm.